



EYECAM SV1000

Designed for the transportation industry in mind




The EYECAM SV1000 utilizes cutting-edge transportation technology to deliver superior image quality with a ruggedized build that allows your bus to capture crisp footage and withstand rough conditions, both day and night.

HDR High Dynamic Range for Superior Image Quality

Easily connects with EYEVideos 4

Weatherproof

KEY USES

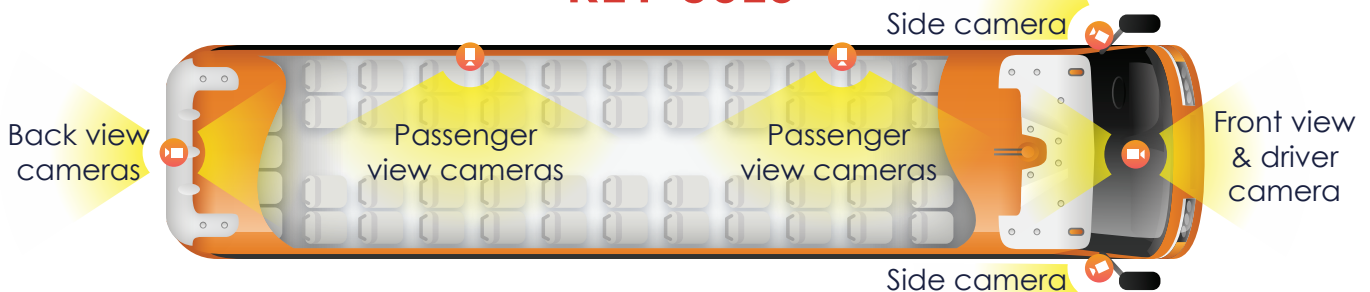

SPECIFICATIONS

Image Sensor	1/3" Progressive Scan CMOS	Backlight compensation	Yes, zone optional
Min. Illumination	Color: 0.01Lux @ (F1.2, AGC ON), 0 Lux IR Color: 0.028Lux (F2.0, AGC ON), 0 Lux IR	Network Storage	Support microSD/SDHC/SDXC card (128 Gb) local storage and NAS (NFS, SMB/CIFS), ANR
Shutter Speed	1/3 s to 1/100,000 s	Alarm Trigger	Motion detection, video tampering, network disconnected, IP address conflict, illegal login
Digital Noise Reduction	3D DNR	API	HDD full, HDD error
2-Axis Adjustment	Pan: -20° to 20°, Tilt: -15° to 20°	Simultaneous Live View	ONVIF, CGI, ISAPI
Focal Length	2.8mm, 4mm, 6mm, 8mm, and 12mm, optional	Operating Conditions	Up to 6 channels
Lens Mount	M12		-40°C to +70°C (-22°F to +149°F), Humidity 95% or less (non-condensing)
IR Range	20 to 30 m	Power Supply	DC12V ±10% / PoE(802.3af)
Video Compression	H.265/H.264/MJPEG	Power Consumption	DC12V: 7W MAX / PoE: 8.5W MAX
Video Bit Rate	32 Kbps to 8 Mbps	Protection Level	IP68
Region of Interest	Supported	Dimensions	155.17 x 110.9 x 60.8mm
Max. Resolution	1280 x 960	Weight	846g
Image Setting	Rotate mode, saturation, brightness, contrast, sharpness, AGC, and white balance are adjustable by client software or web browser		

Toll Free: 833-EYERIDE

www.eyeride.io